
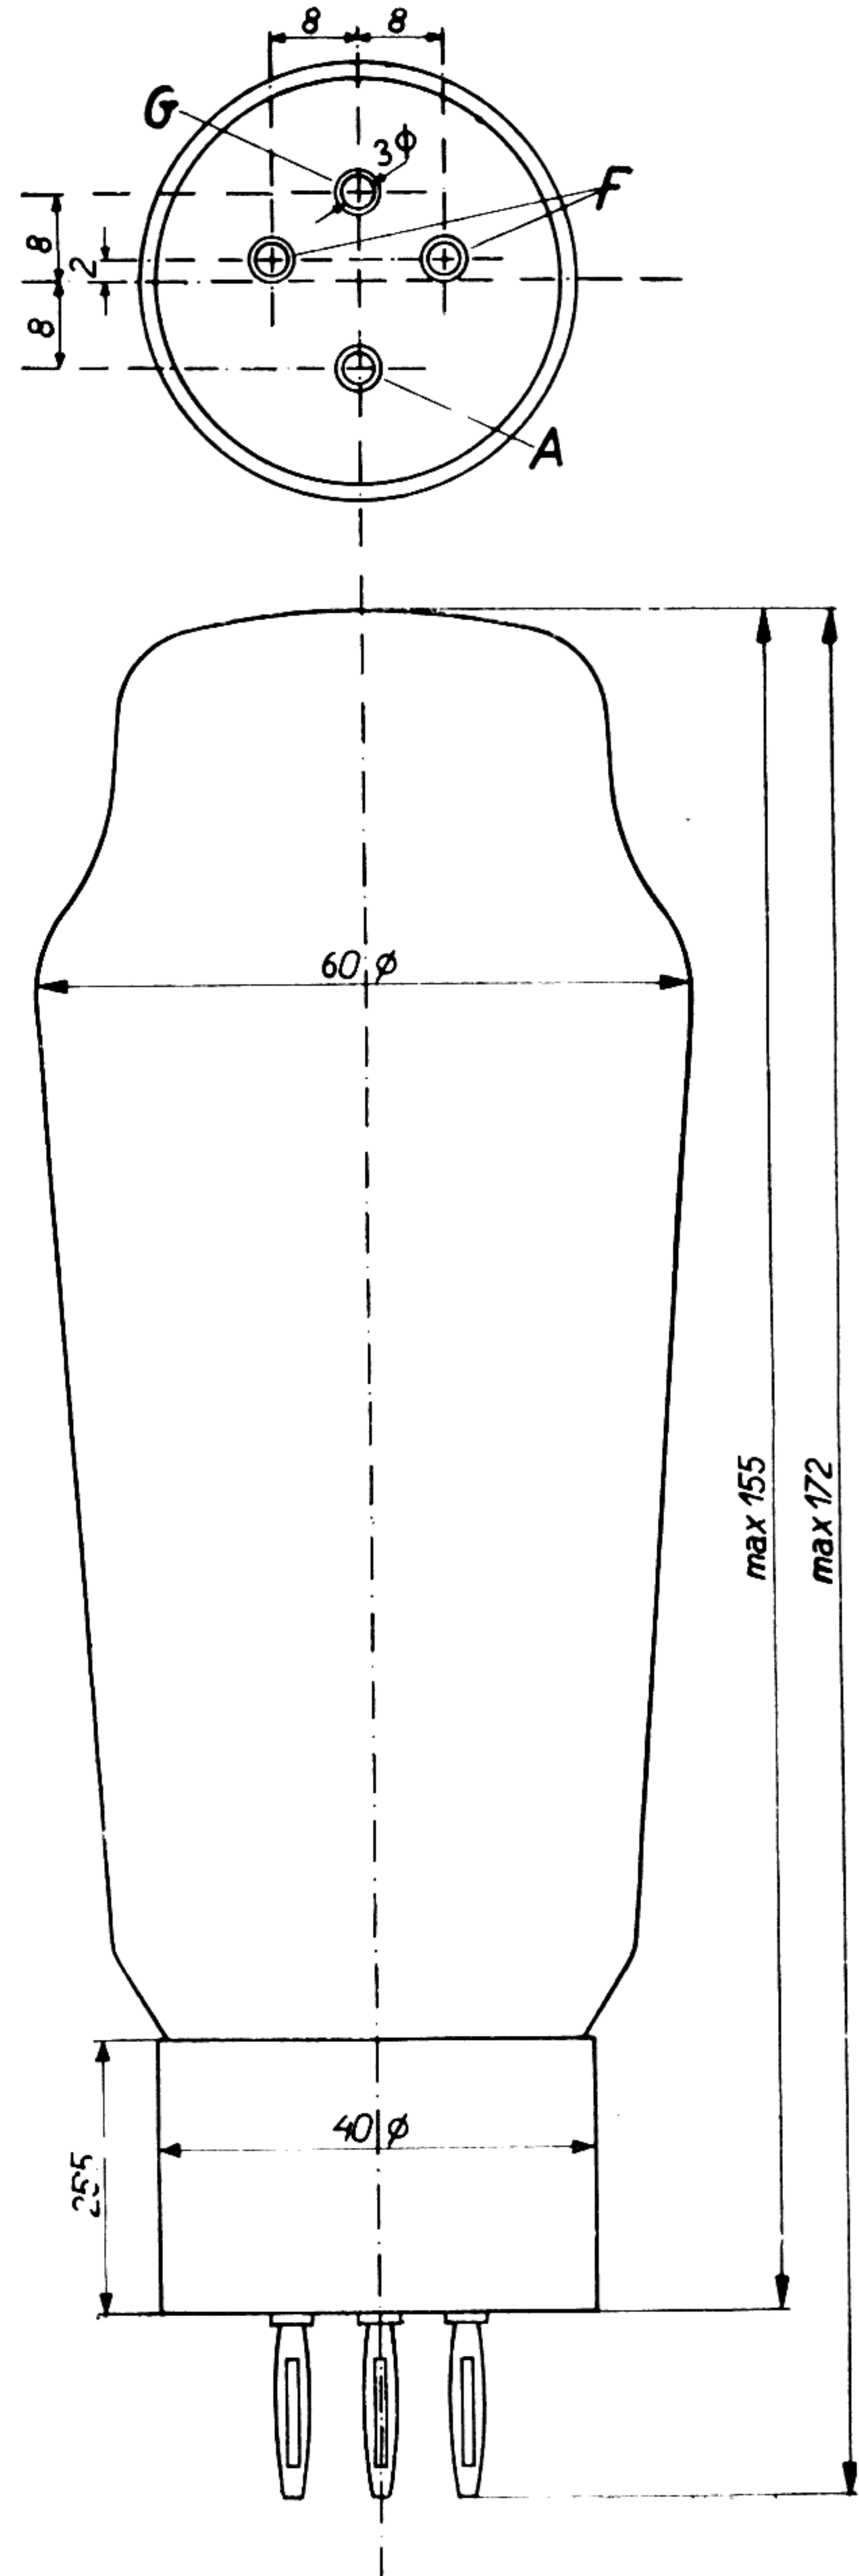


TUNGSRAM RADIO

Kraftverstärkerröhre mit Oxydheizfaden


Gewicht cca 100 g.

P 27/500

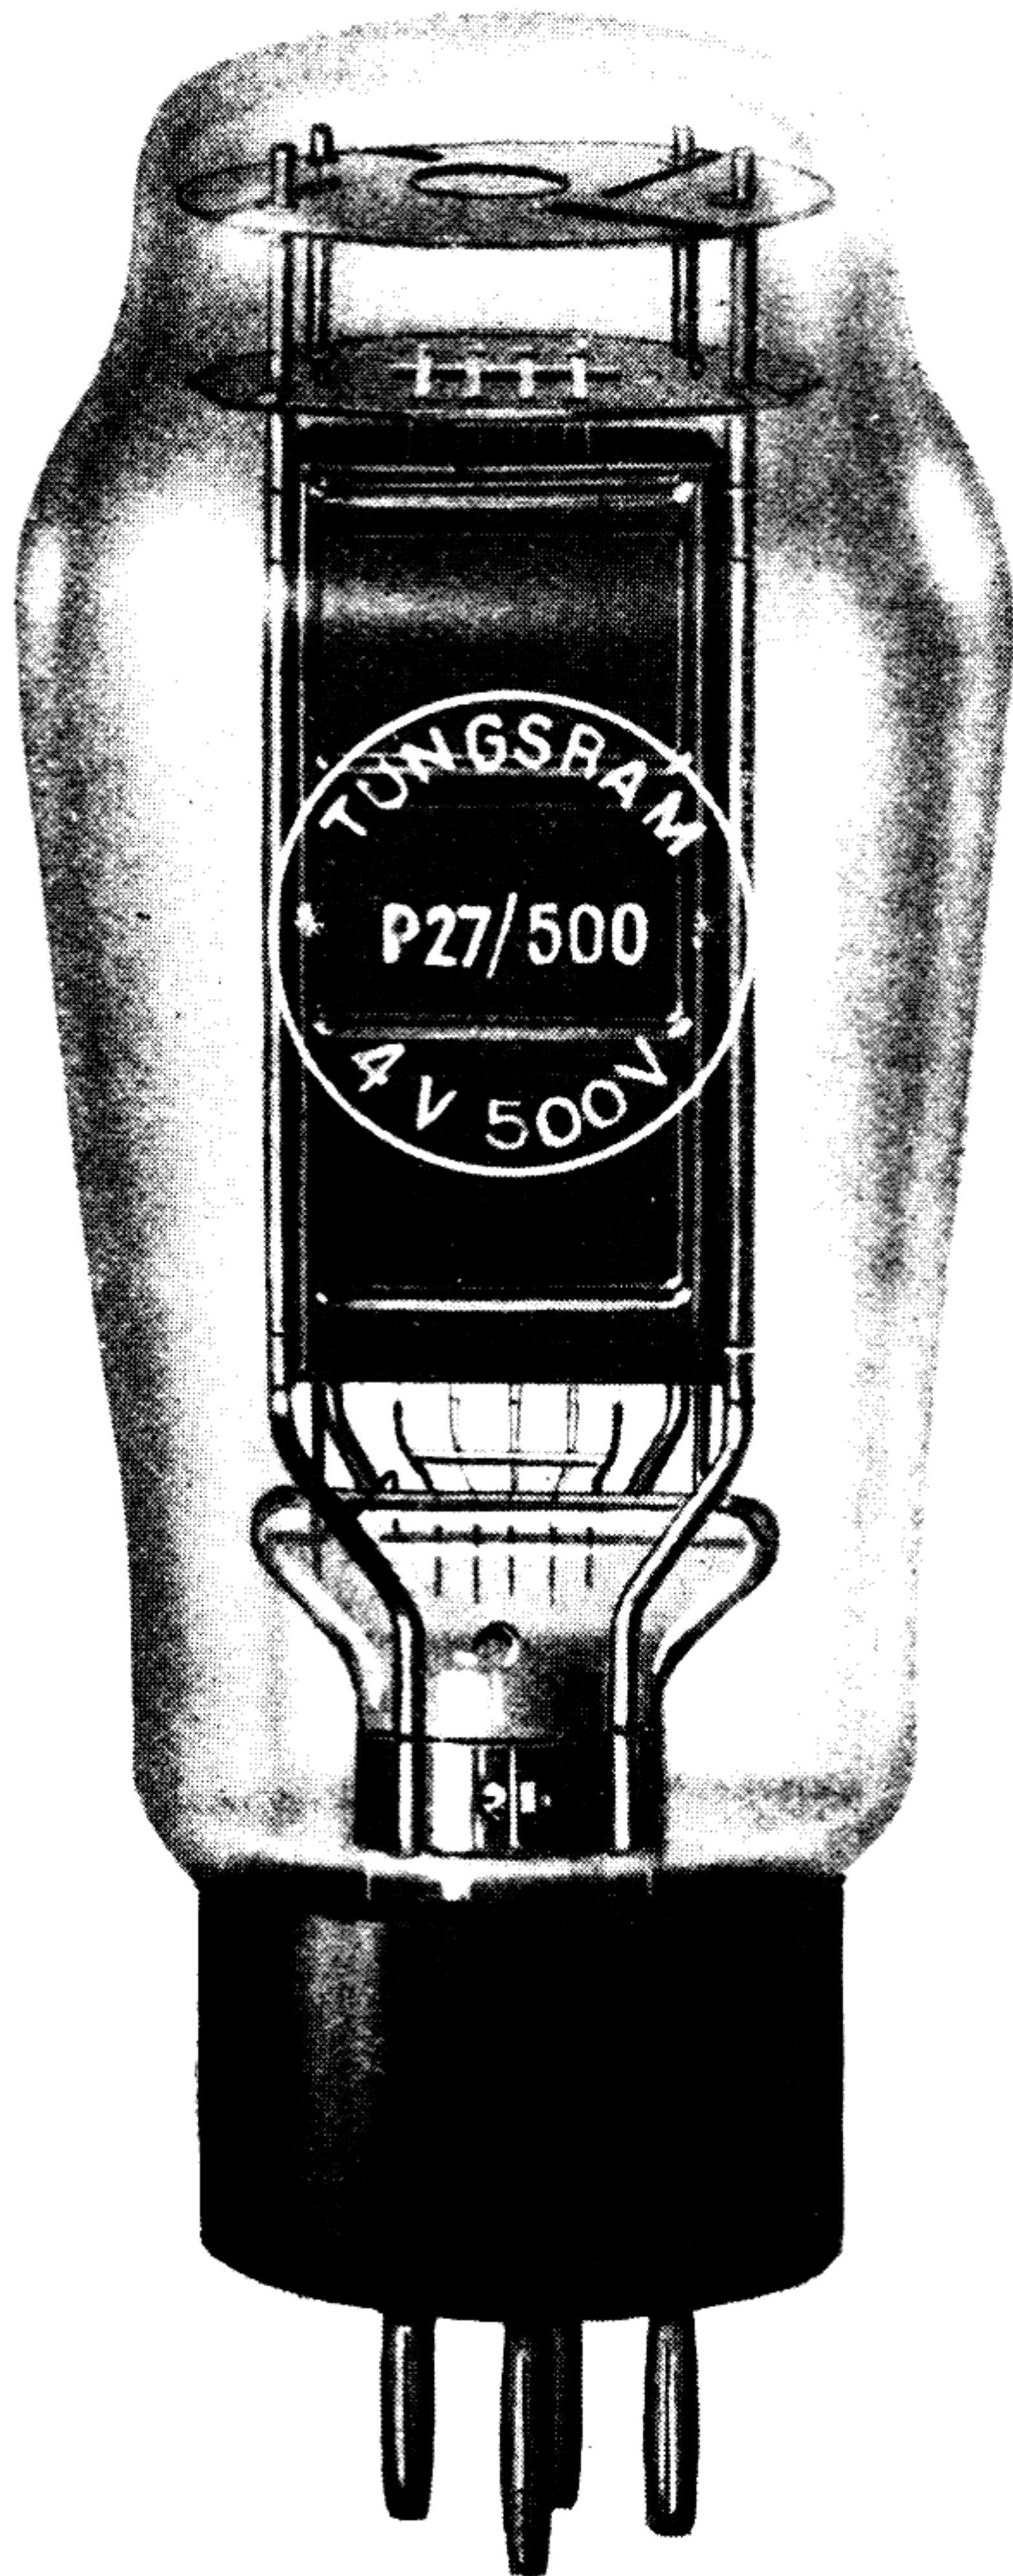

Sockel: F 44

TUNGSRAM RADIO

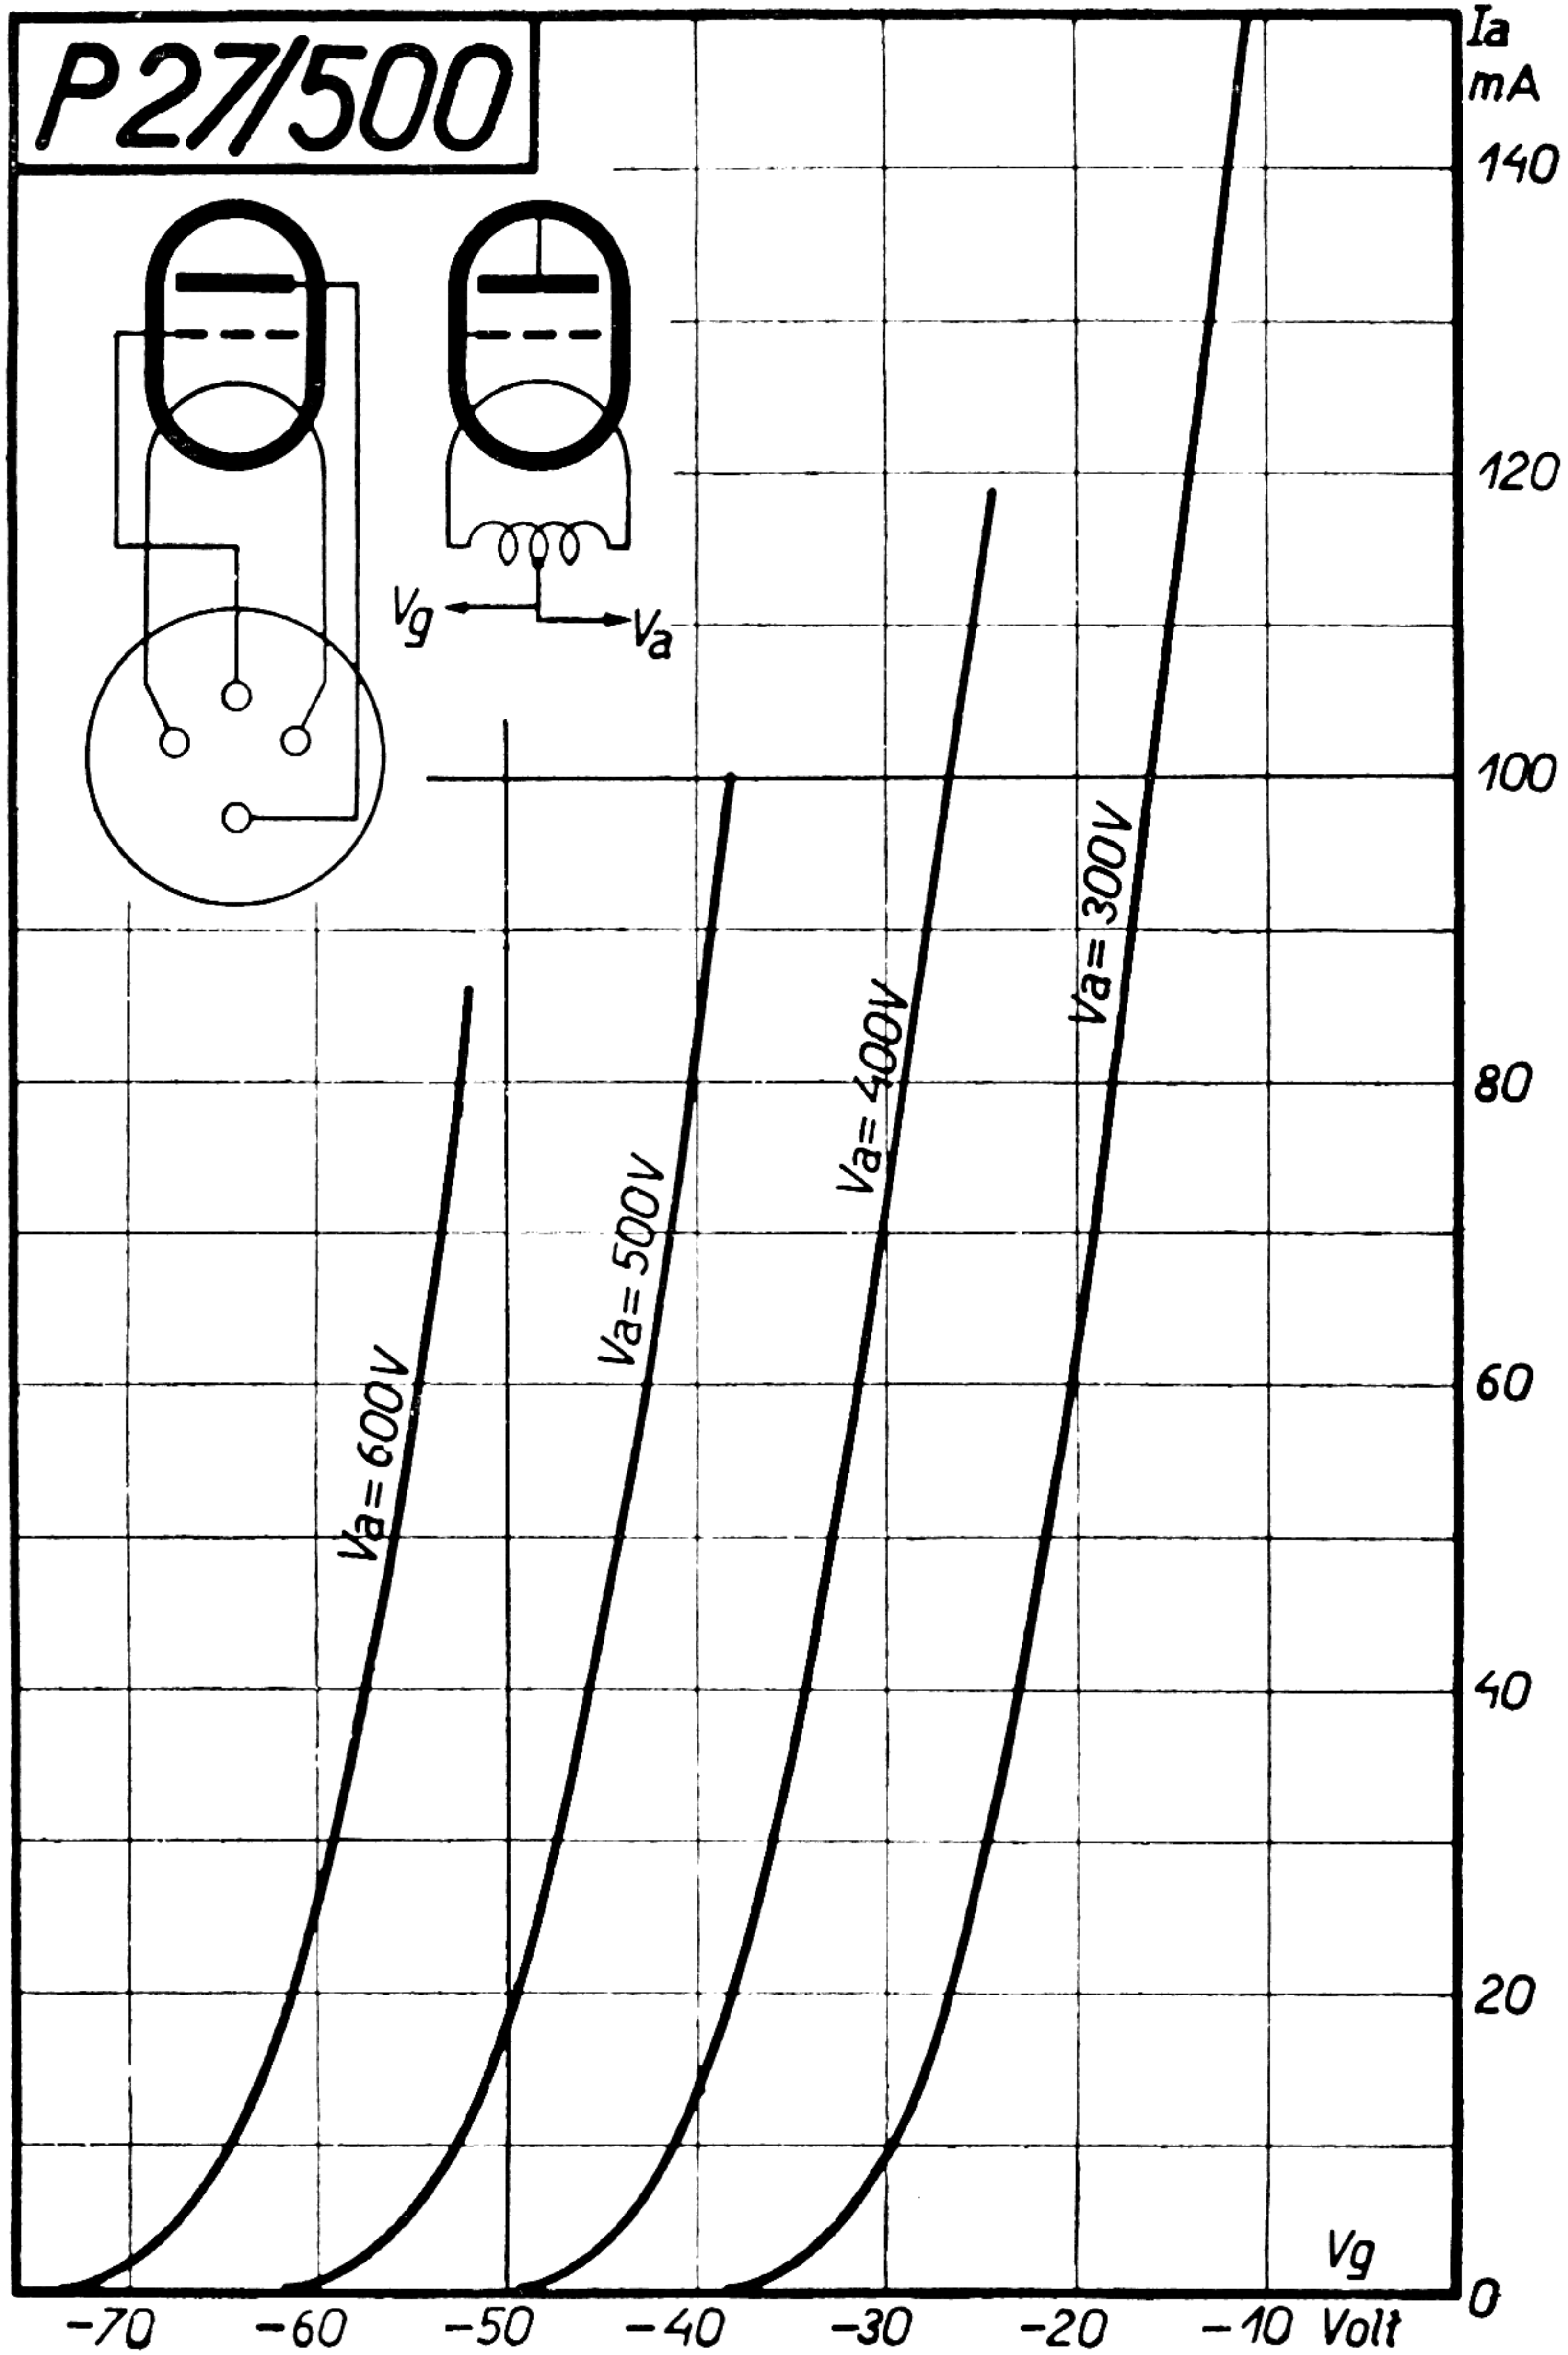

$V_f = 4$ Volt
 $I_f = 2$ Amp.
 $V_{a\ max} = 500$ Volt
 $S = 7.5$ mA/V
 $g = 9$
 $R_i = 1200$ Ohm
 $W_{a\ max} = 25$ Watt

$C_{ga} = 16$ μ F
 $C_{gk} = 8.5$ "
 $C_{ak} = 5$ "

TUNGSRAM RADIO

